



Gokin
Higher Generated Energy
Higher Reliability
Lower BOS
Excellent Micro-crack Resistance
High Temp


•	-40°C ~ +85°C	• 70°C	•	• 45±2°C
•		•		

Cell Type	GBC
Glass	
Frame	Anodized aluminum
Output Cables	or Customized Length
Dimension	
Connector	
Packaging	
Protection Class	
Fire Rating	

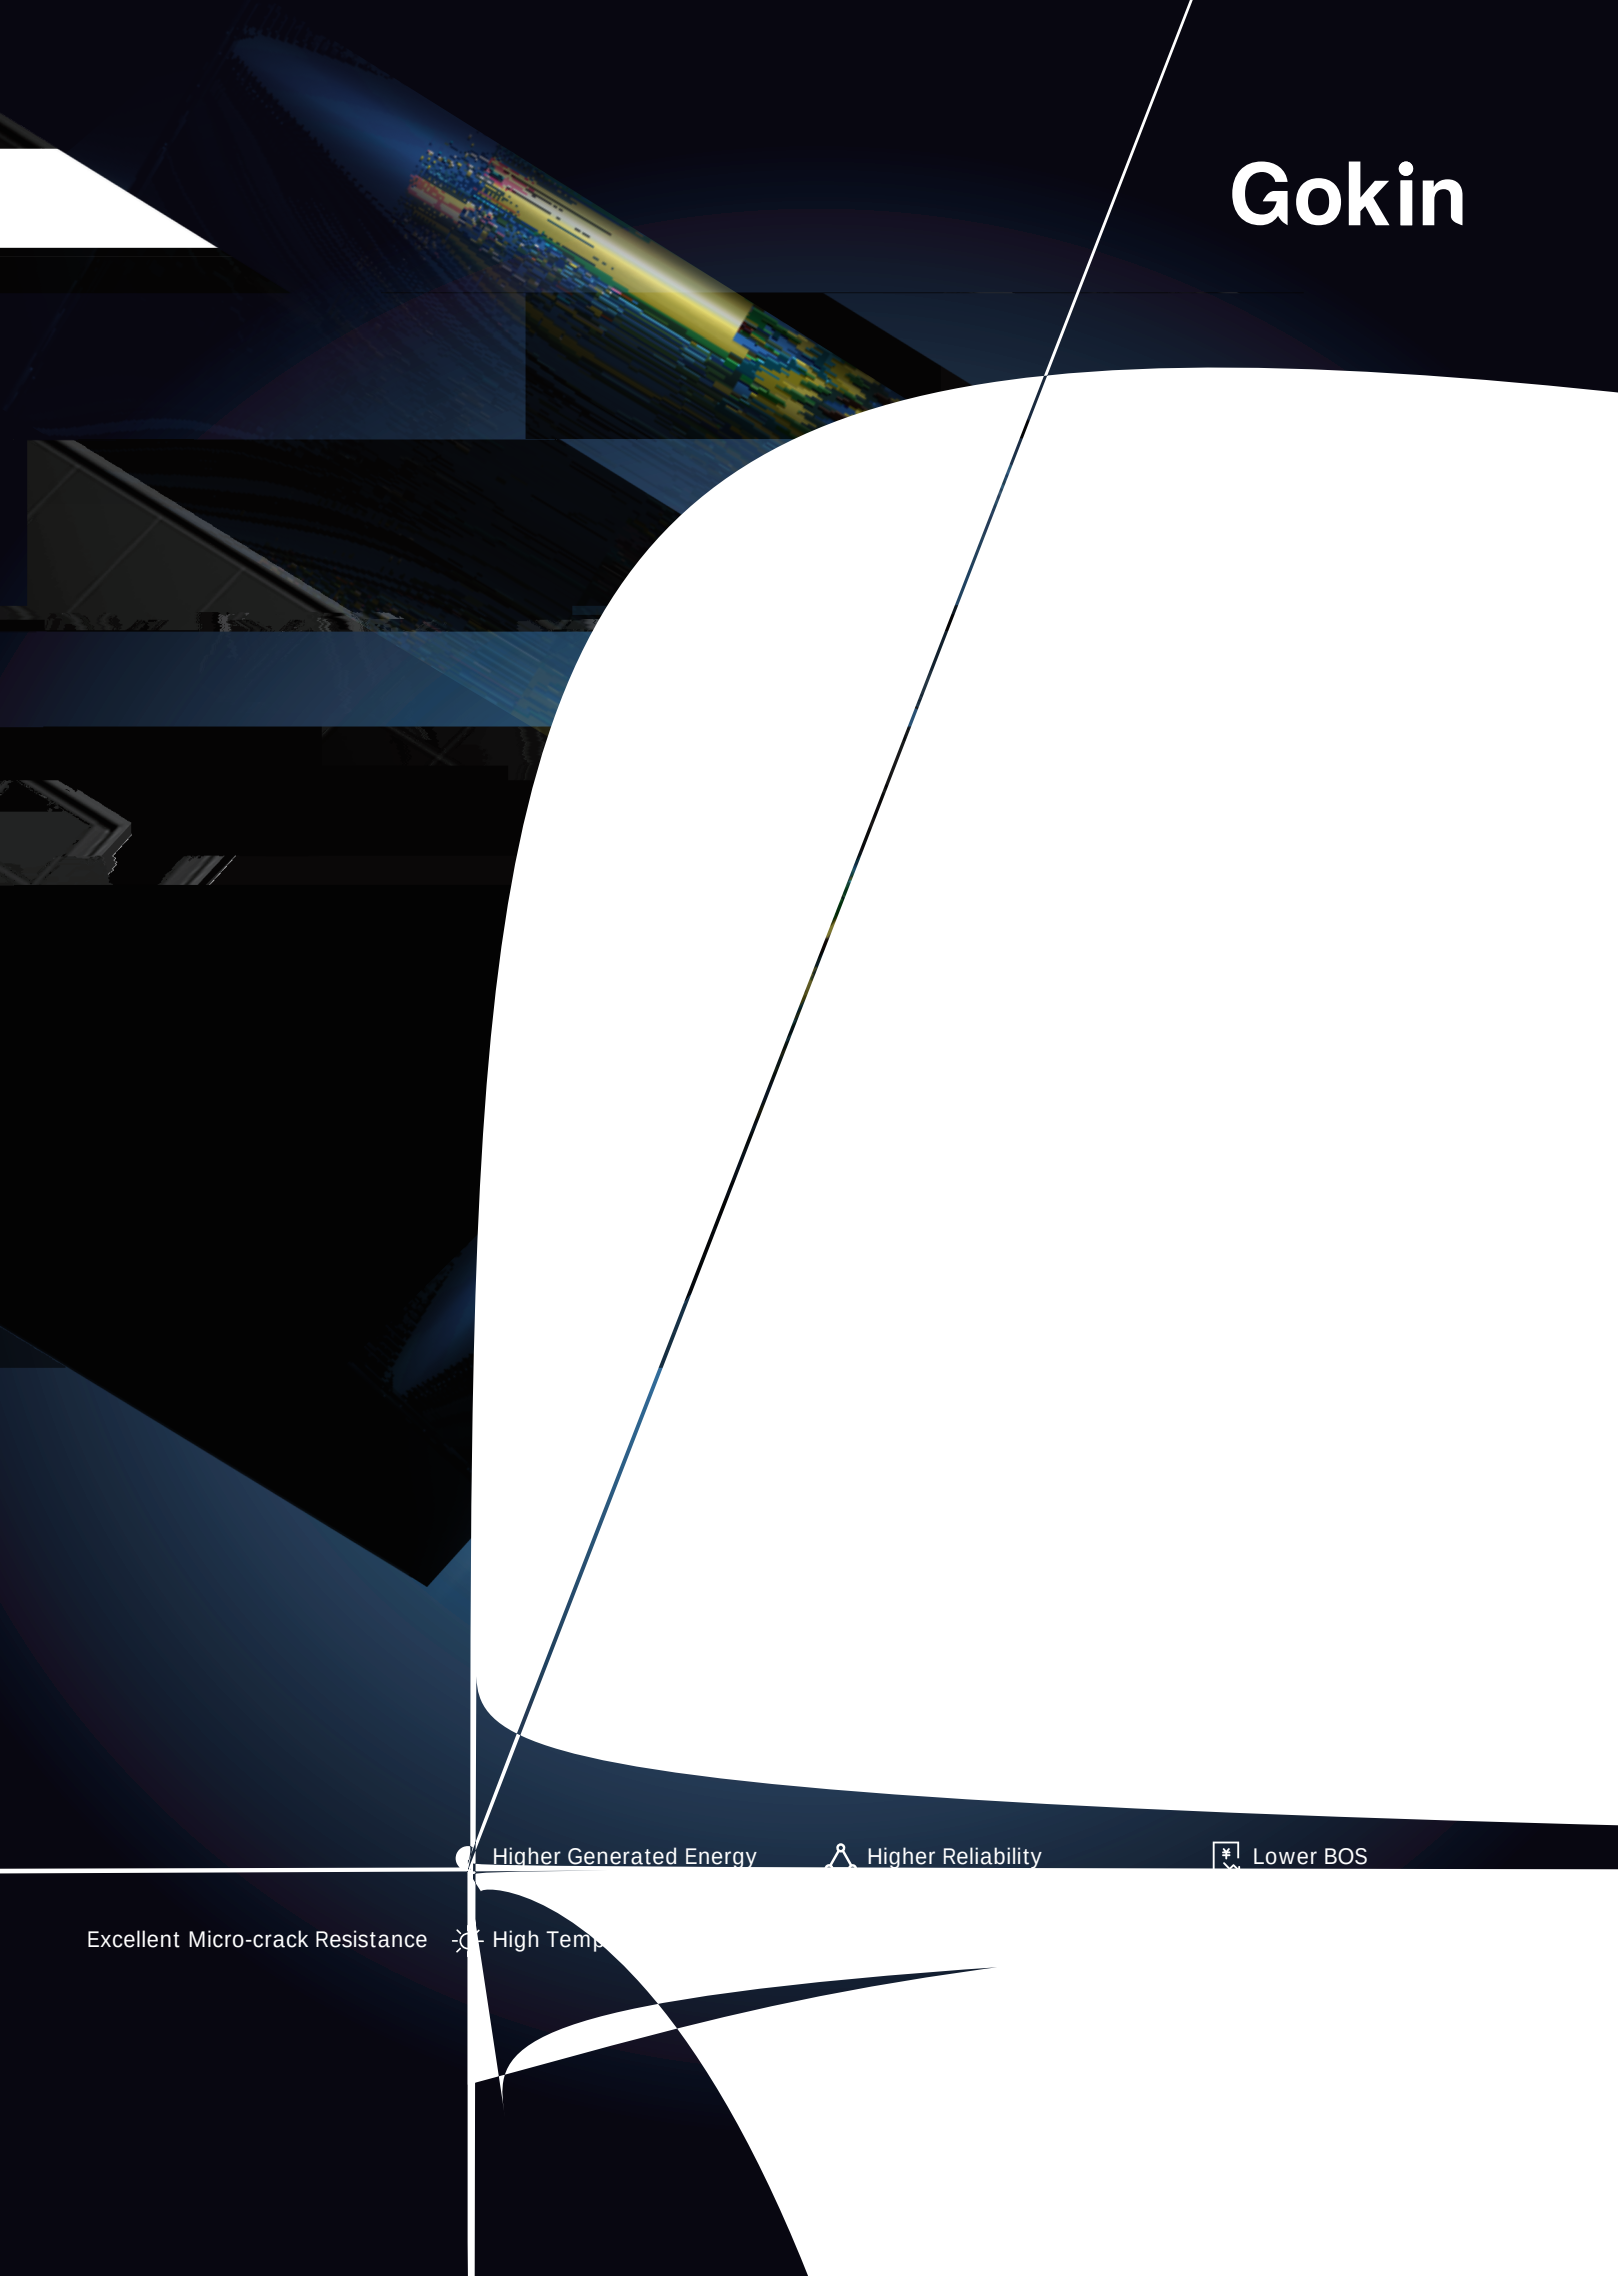









φ φ φ


Module Type			
Testing Condition	STC		

Guaranteed Module Performance

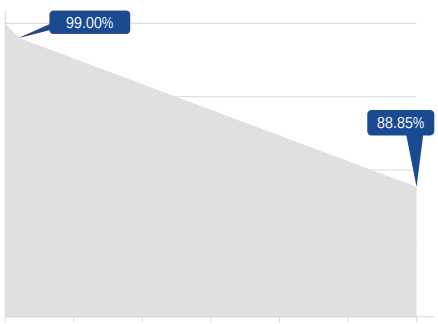

Front Side Maximum Static Loading	
Rear Side Maximum Static Loading	
Hailstone Test	

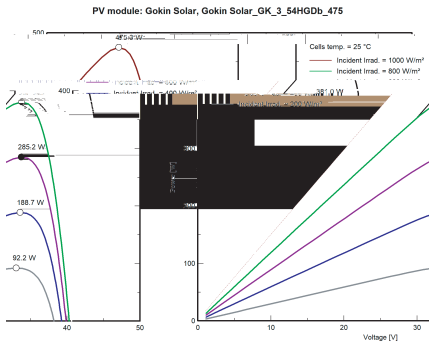

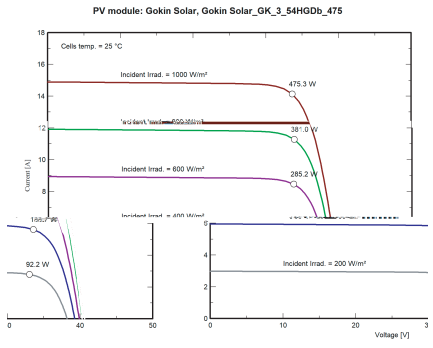

Gokin

Gokin