
Gokin

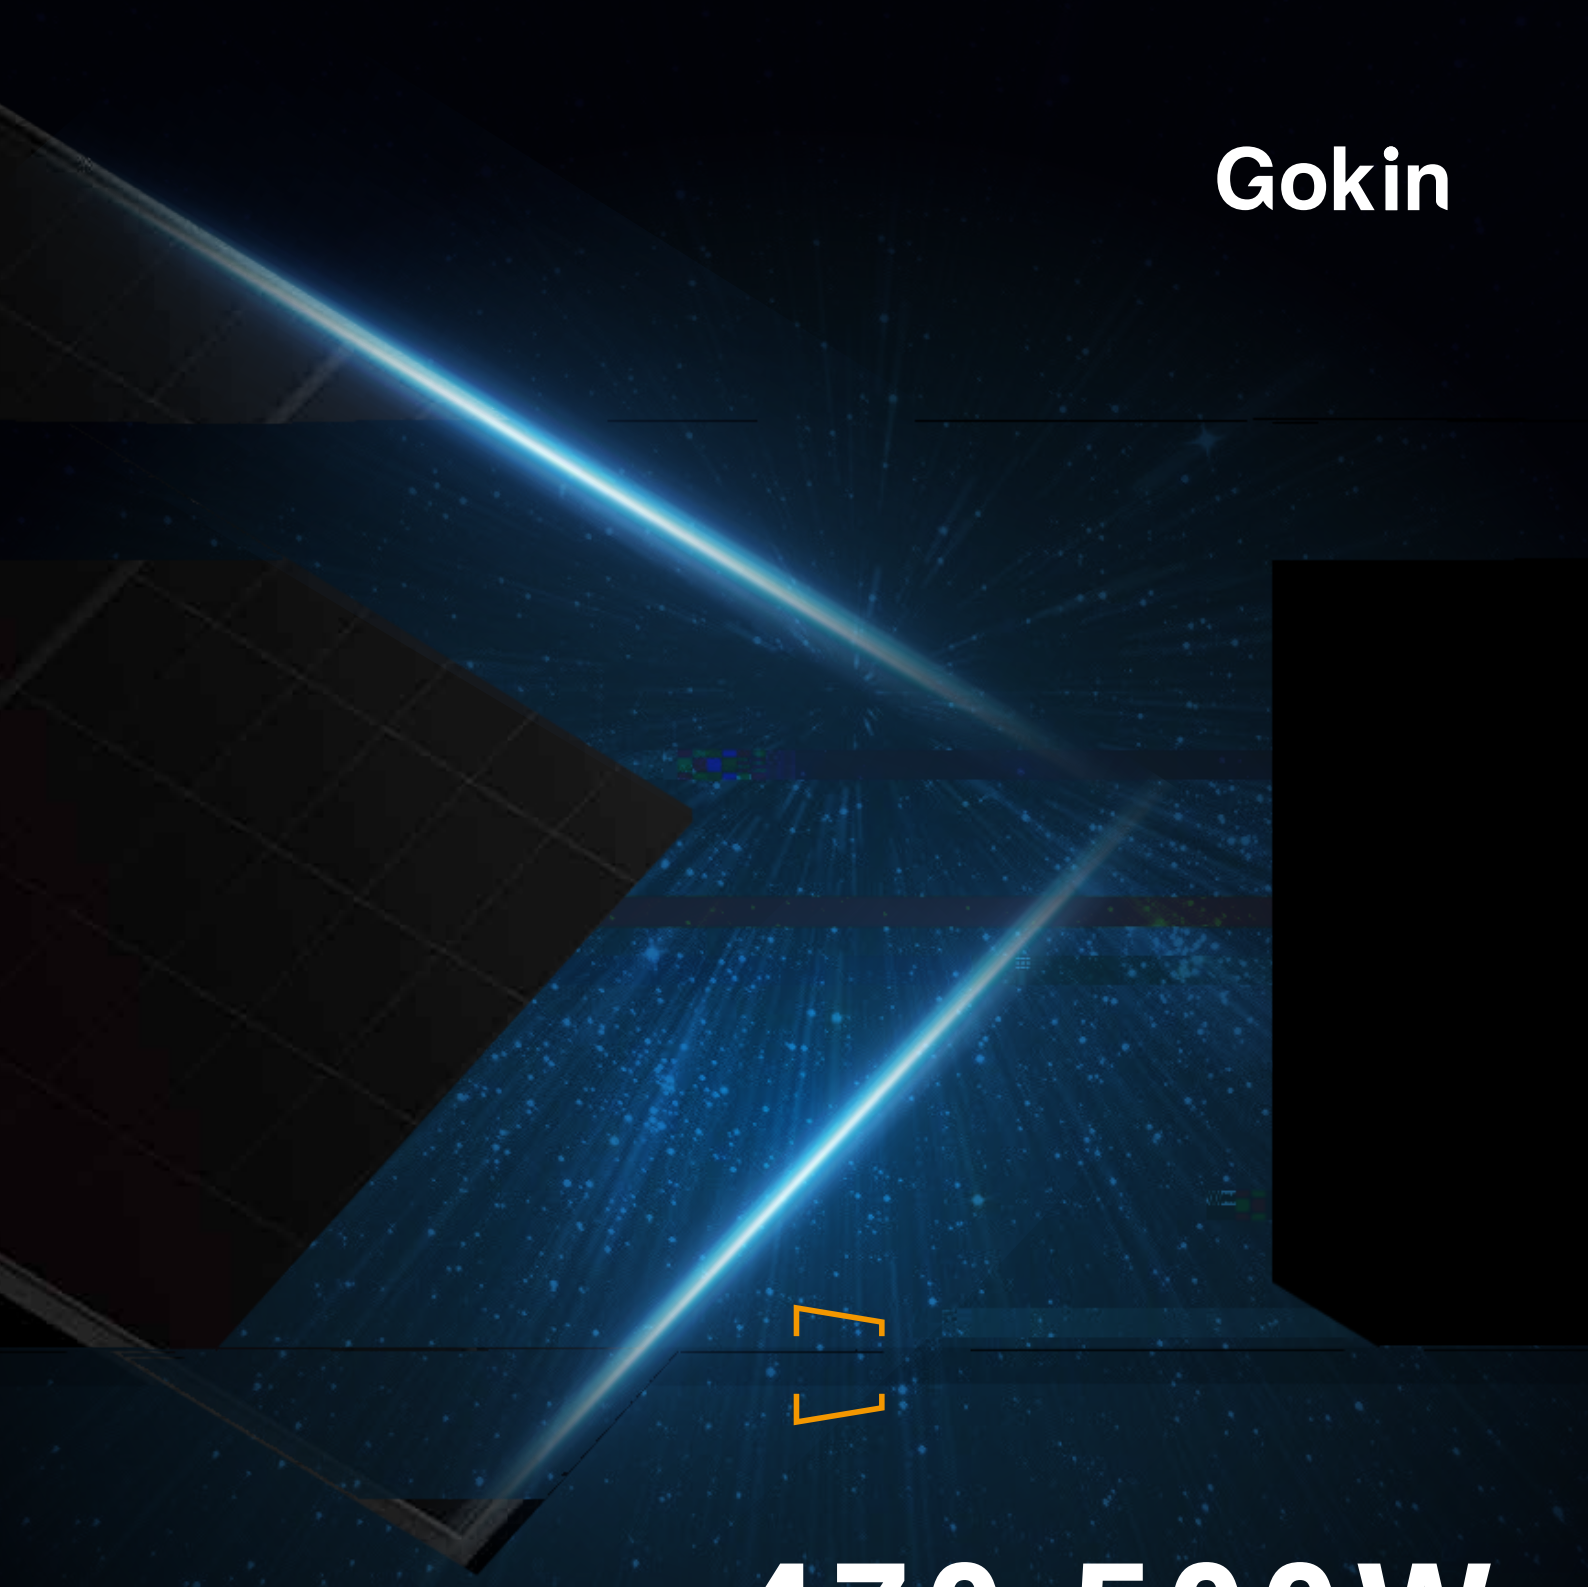

470-500W

Superior Temperature coefficient

A D

Module Efficiency up to

1%

0.35%

15 ye

Product Warranty

r Power Warranty

T land CERTIFIED

CE


- Operating Temperature -40°C ~ +85°C
- Power Tolerance 0~+3%
- Junction Box IP68
- NOCT 45±2°C
- Maximum Series Fuse Rating 25A
- Maximum System Voltage 1500V(IEC)

Mechanical Parameters

	108 6×18
	TüV 1×4mm2
	24.8kg (54.67lbs)
	1800×1134×30mm
	MC4 Compatible/MC4-Evo2
	37 pcs per pallet 222 pcs per 20' GP 888 pcs per 40' HC
	Class II
	IEC Class C

Engineering Drawings

Electrical Characteristics STC Test)

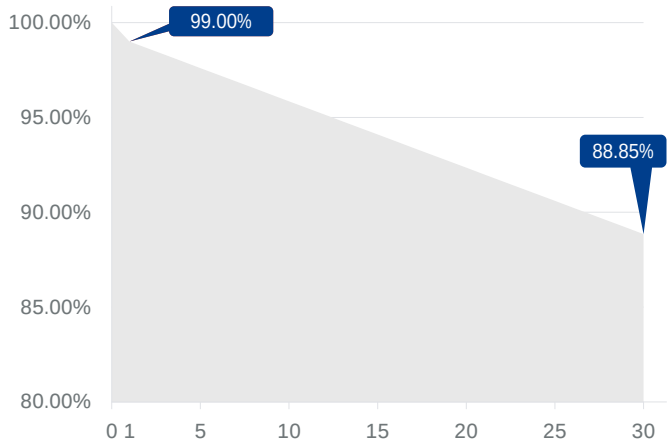

Temperature Ratings (STC)

Temperature Coefficient of Isc	+0.05%/
Temperature Coefficient of Voc	-0.22%/
Temperature Coefficient of Pmax	-0.26%/

Mechanical Loading

	5400Pa
	2400Pa
	25 mm diameter hail at 23 m/s